

Eluxtra™ ProFlex 2835 LED Strip Light, Monochrome

XXXXK-2835PF-72-15.5-5m, XXXXK-2835PF-72-15.5-10m



PRODUCT DESCRIPTION

Eluxtra™ ProFlex 2835 LED Strip Light combines flexibility with durability, thanks to its rugged silicone casing. Providing high-quality illumination in monochrome white (2700K - 6500K), this IP67 strip light is ideal for indoor and outdoor use. Injection molded ends ensure your lighting will remain free from dust and water.

Eluxtra™ ProFlex 2835 LED Strip Light is UL Listed and can run up to 15 meters when powered from one end. It operates on 24 VDC and is easily controlled using one of our compatible controllers or dimmers. Custom lengths and wire exits available by request.

Ideal Application: Ideal for indoor and outdoor applications and is an ideal product for retail, hospitality, scenic and architectural installations.

PRODUCT FEATURES

- High-quality silicone casing engineered for durability & easy maintenance
- Flexible & easy to install
- IP67, suitable for indoor or outdoor use
- Dust resistant
- Run length up to 15 meters when powered from one end
- 2-meter input & output leads
- Compatible connectors available
- Available in 5m and 10m reel lengths

REGULATORY



- UL Listed, RoHS, UKCA & CE Compliant
- Warranty: 5 Year Limited

TECHNICAL SPECIFICATIONS

Product Number	2700K-2835PF-72-15.5-Xm	3000K-2835PF-72-15.5-Xm	4000K-2835PF-72-15.5-Xm	5700K-2835PF-72-15.5-Xm	6500K-2835PF-72-15.5-Xm
Ambient Temperature	-40°C to 55°C	-40°C to 55°C	-40°C to 55°C	-40°C to 55°C	-40°C to 55°C
Average Lifetime	50,000 hours	50,000 hours	50,000 hours	50,000 hours	50,000 hours
Beam Angle	150°	150°	150°	150°	150°
Brightness	800 lm/meter	900 lm/meter	900 lm/meter	900 lm/meter	900 lm/meter
Color Detail	2700K	3000K	4000K	5700K	6500K
Density	72 LEDs/m	72 LEDs/m	72 LEDs/m	72 LEDs/m	72 LEDs/m
Height	0.24 in [6 mm]	0.24 in [6 mm]	0.24 in [6 mm]	0.24 in [6 mm]	0.24 in [6 mm]
Input Current	2500 mA / 5000 mA	2500 mA / 5000 mA	2500 mA / 5000 mA	2500 mA / 5000 mA	2500 mA / 5000 mA
Input Voltage	24 DC	24 DC	24 DC	24 DC	24 DC
IP Rating	IP67	IP67	IP67	IP67	IP67
Linkable Up To	15 meters	15 meters	15 meters	15 meters	15 meters
Lead Detail	Bare Wire / 2m (both)	Bare Wire / 2m (both)	Bare Wire / 2m (both)	Bare Wire / 2m (both)	Bare Wire / 2m (both)
LED Node Size	2835	2835	2835	2835	2835
Length	16.4 ft [5 m] / 32.81 ft [10 m]	16.4 ft [5 m] / 32.81 ft [10 m]	16.4 ft [5 m] / 32.81 ft [10 m]	16.4 ft [5 m] / 32.81 ft [10 m]	16.4 ft [5 m] / 32.81 ft [10 m]
Min. Cutting Increment	3.28 in [83.3 mm]	3.28 in [83.3 mm]	3.28 in [83.3 mm]	3.28 in [83.3 mm]	3.28 in [83.3 mm]
Power (Watts/ft)	3.7 Watts/ft	3.7 Watts/ft	3.7 Watts/ft	3.7 Watts/ft	3.7 Watts/ft
Power (Watts/m)	12 Watts/m	12 Watts/m	12 Watts/m	12 Watts/m	12 Watts/m
Regulatory	UL, RoHS, UKCA, CE	UL, RoHS, UKCA, CE	UL, RoHS, UKCA, CE	UL, RoHS, UKCA, CE	UL, RoHS, UKCA, CE
Warranty	5 years limited	5 years limited	5 years limited	5 years limited	5 years limited
Width	0.61 in [15.5 mm]	0.61 in [15.5 mm]	0.61 in [15.5 mm]	0.61 in [15.5 mm]	0.61 in [15.5 mm]


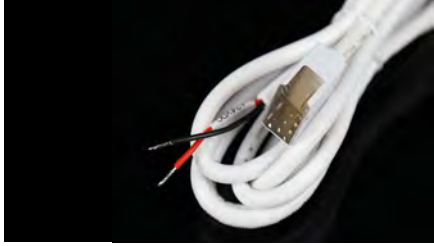


Eluxtra™ products are exclusively available for purchase through Environmental Lights and City Theatrical.

MECHANICAL SPECIFICATIONS






Min Bending Diameter
1.97 in [50 mm]

CONNECTORS & ACCESSORIES

Product	Description
<p>Eluxtra™ ProFlex LED Strip Light, End Cap <i>PF-SP-EC</i></p> 	<p>This IP67 end cap is used to seal Eluxtra™ ProFlex LED strip light, protecting it from the elements such as dust and rain. It is durable and easy to install.</p>
<p>Eluxtra™ ProFlex LED Strip Light, 2-Wire Connector 01 <i>PF-2-SPS-01-2m</i></p> 	<p>This is a 2-wire, IP67 connector designed for use with Eluxtra™ ProFlex LED strip lights. It features a 2-meter lead, providing flexibility for various setups. Look for the "01" marking on your strip light to ensure you are connecting in the proper direction.</p>
<p>Eluxtra™ ProFlex LED Strip Light, 2-Wire Connector 02 <i>PF-2-SPS-02-2m</i></p> 	<p>This is a 2-wire, IP67 connector designed for use with Eluxtra™ ProFlex LED strip lights. It features a 2-meter lead, providing flexibility for various setups. Look for the "02" marking on your strip light to ensure you are connecting in the proper direction.</p>
<p>Eluxtra™ ProFlex LED Strip Light, 2-Wire Jumper <i>PF-2-SPS-JUMP-300mm</i></p> 	<p>This is a 2-wire, IP67 jumper designed to connect two sections of Eluxtra™ ProFlex LED strip lights that have been cut to custom lengths. Look for the "01" and "02" markings on your strip light to ensure you are connecting in the proper direction.</p>

CONNECTORS & ACCESSORIES CONT'D






Product	Description
<p>Eluxtra™ ProFlex LED Strip Light, Mounting Channel - 2m PF-ACH-2m</p> 	<p>This 2-meter aluminum extrusion is designed for the Eluxtra™ ProFlex LED Strip Light, fitting securely without adhesive or extra fasteners. It includes 5 pre-drilled holes and screws for easy installation, and can be easily cut with a metal saw.</p>
<p>Eluxtra™ ProFlex LED Strip Light, Mounting Clip PF-CLIP</p> 	<p>This 35 mm aluminum clip securely holds Eluxtra™ ProFlex LED Strip Light without adhesive. It includes a pre-drilled hole and screw for easy installation.</p>
<p>Eluxtra™ ProFlex LED Strip Light Anchor PF-ANCHOR</p> 	<p>This high-strength hold-down clip is designed to securely fasten Eluxtra™ ProFlex LED Strip Light, providing reliable support in demanding applications. It includes two 9.93 mm (about 3/8 inch) screws for easy installation.</p>

Note: Silicone Injection Molded Connectors are available by custom order. More information on next page.

Eluxtra™ products are exclusively available for purchase through Environmental Lights and City Theatrical.

CONNECTORS & ACCESSORIES CONT'D

Note: Silicone Injection Molded Connectors are available by custom order. Contact contactus@environmentallights.com for more information.

Product	Description
Injection Molded Connector from Front 	Custom Injection Molded Connector with front wire exit. Available via custom order.
Injection Molded Side Connector from Left 	Custom Injection Molded Connector with left wire exit. Available via custom order.
Injection Molded Side Connector from Right 	Custom Injection Molded Connector with right wire exit. Available via custom order.
Injection Molded Connector from Bottom 	Custom Injection Molded Connector with bottom wire exit. Available via custom order.
Injection Molded End Cap 	Custom Injection Molded End Cap with bottom wire exit. Available via custom order.

Eluxtra™ products are exclusively available for purchase through Environmental Lights and City Theatrical.



Environmental Lights
 888-880-1880
contactus@environmentallights.com



City Theatrical
 US: 800-230-9497 / sales@citytheatrical.com
 UK: +44 (0)20 8949 5051 / salesuk@citytheatrical.com