


## ProFlex Neon Installation Manual

### LN-PF, LNW-PF, PLN-PF, PLNW-PF: Installation Manual


#### Handling

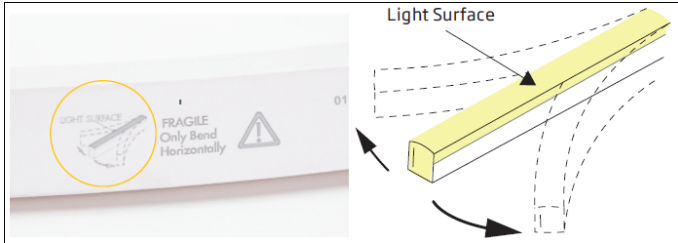

Only bend the neon in its intended direction. Do not twist or stretch neon. Above image shows horizontal bending neon.




Do not handle more than 2 meters unsupported. Support longer sections at multiple points to avoid excess stress, bending or twisting.

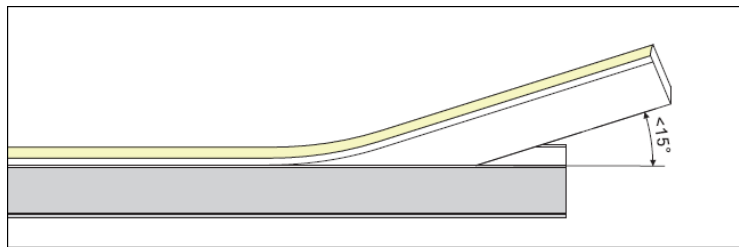


Align the neon with the channel and smoothly press it into place with your palm to avoid applying pressure to a single point. Keep the angle between the neon and the channel to less than 15-degrees to avoid bending it in the wrong direction.

Eluxtra™ products are exclusively available for purchase through Environmental Lights and City Theatrical.

## Installation

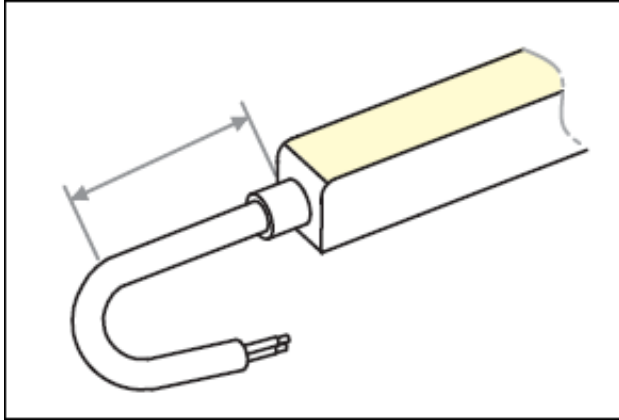

Leave 20mm of cable extended from the connector before bending.

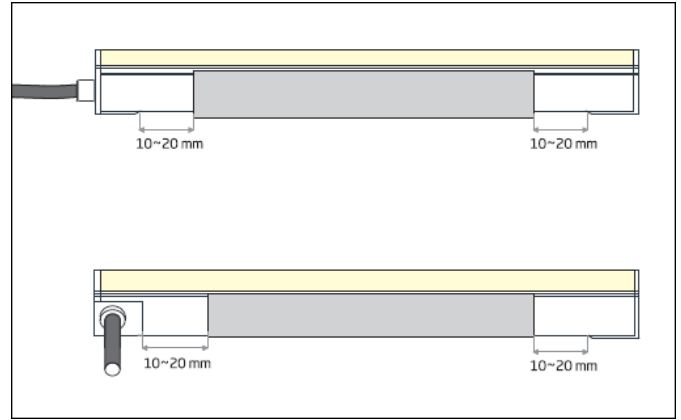

Reserve 10-20mm of space between the connector and channel.



Reserve 5mm of space in profile joints to allow for contraction and expansion.



Leave appropriate space in between profiles to bend the neon.

Eluxtra™ products are exclusively available for purchase through Environmental Lights and City Theatrical.